


ELECTRICAL & MECHANICAL SPECIFICATION

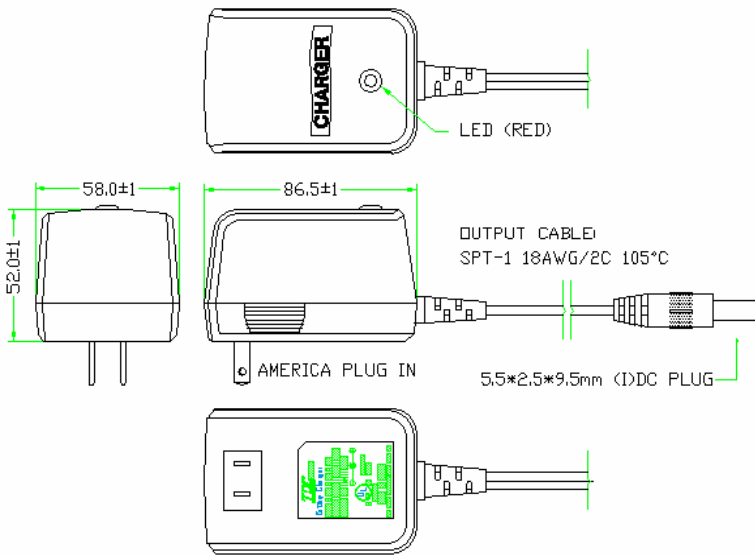

ELECTRONICAL SPECIFICATION

Input Voltage	120	Volts
Frequency (Hz)	60	Hz
Power Rated (W)	12	W
Exciting Current With No load	50	mA Max
Exciting Current With Full load	100	mA Max
Output Voltage (DC)	9.0	VoltDC±5%
Output Current (O/P 9.0VDC)	0.3	Amp±5%
Output Voltage No-load (DC)	10.5	VoltsDC±5%
HI-POT :		
Leakage Current	0.5	m A
Test Time	1	Min
PRI TO SEC	1250	Volts
PRI TO CORE	1250	Volts
SEC TO CORE	1250	Volts
Insulation Class	B (130)	°C
Standard Charging	10~20	Hr

Battery/Ahr	Times/Hours
4	11
7	20

LED INDICATE

Circuit Type	No Load	Charging	Full Charge
A	LED OFF	LDE ON	LED OFF
B	LED ON	LED OFF	LED ON
C	LED GREEN	LED RED	LED GREEN
D	LED OFF	LED RED	LED GREEN
E	LED OFF	LED ON	LED FLASH
F	LED OFF	LED FLASH	LED ON

MECHANICAL SPECIFICATION

Dimensions (L*W*H)	86.5*58.0*52.0	mm
Weight	430	g
Environment:		
Operating Temperature	-10 To 40	°C
Storage Temperature	-20 To 70	°C

Output Cable: **SPT-1 18AWG/2C 105 °C**
1.8M LENGTH+5.5*2.5*9.5 (I) DC

Protected Against Short-Circuit @

Protected Against Polarity Inversion @

Relative Temperature 40°C±2°C

RELATIVE HUMIDITY 90% RH

ELECTRICAL CIRCUIT:

