

K Series

120 W




Motor Specification

Motor	Model	Output	Volt	Freq	Pole	Duty	Rated				Start Torque		Capacitor
							Speed	Current	Torque		N.m	kgf.cm	μf/VAC
		W	V	Hz	P		r/min	A	N.m	kgf.cm	N.m	kgf.cm	μf/VAC
AI90-15120S4-F	GI5K120GU-AF	120	1ph110	50	4	CONT	1250	1.80	0.90	9.00	0.65	6.50	25.0/250
AI90-35120S4-F	GI5K120GU-CF	120	1ph220	50	4	CONT	1300	0.92	0.87	8.65	0.75	7.50	7.0/450
AI90-35120T2-F	GI5K120GU-SF	120	3ph220	50	4	CONT	1300	0.83	0.87	8.65	3.20	32.00	/
AI90-105120T4-F	GI5K120GU-S ₃ F	120	3ph380	50	4	CONT	1300	0.48	0.87	8.65	3.20	32.00	/
AI90-35120S2		120	1ph220	50	4	CONT	2800	1.20	0.40	4.00	0.51	5.05	8.0/450


Gearbox

Frequency	Reduction Ratio		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
			50HZ	Speed	r/min	500	417	300	250	200	166	150	120	100	83	75	60	50	41	37	30	25	20	16	15	12
	Allowable Torque	N.m	2.14	2.57	3.57	4.29	5.38	6.43	6.43	8.05	9.66	11.6	11.6	14.6	17.5	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
		kgf.cm	21.8	26.2	36.4	43.8	54.7	65.6	65.6	82.1	98.6	118	118	149	196	200	200	200	200	200	200	200	200	200	200	200
60HZ	Speed	r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
	Allowable Torque	N.m	1.8	2.16	3	3.6	4.49	5.39	5.39	6.75	8.1	9.72	9.72	12.2	14.6	17.6	19.5	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
		kgf.cm	18.4	22	30.6	36.7	45.8	55	55	68.9	82.7	99.2	99.2	124	149	180	199	200	200	200	200	200	200	200	200	200

Motor Dimension

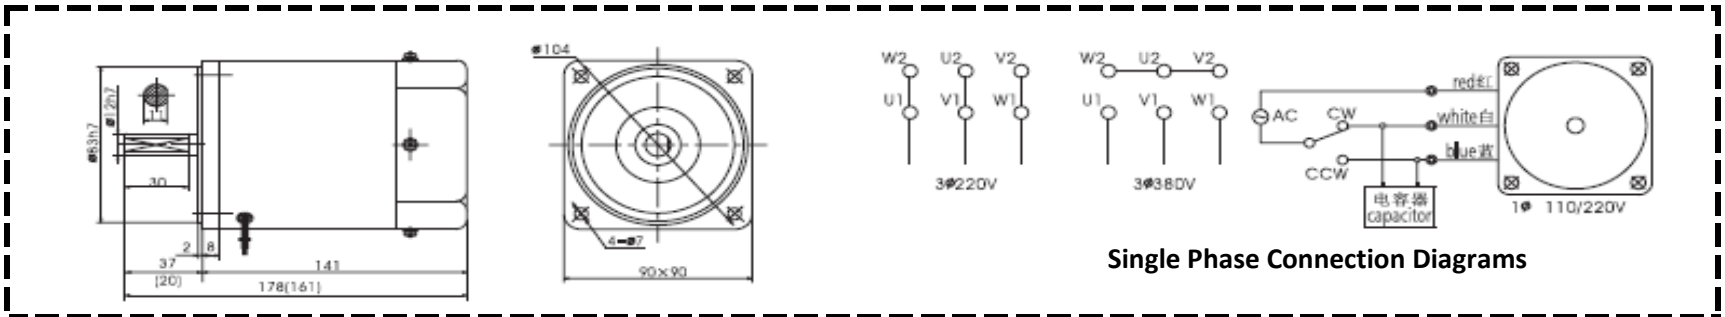

Gearhead Dimension

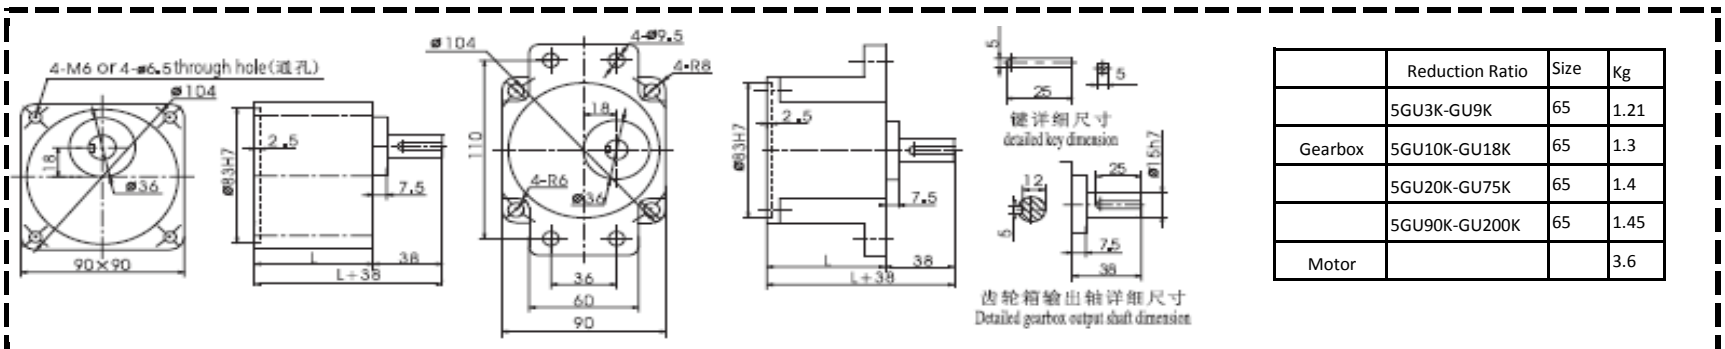

Compacitor

