


**TL-E-2.25-4.5D 35/9**



INPUT VOLTAGE **230~240VAC**

OUTPUT VOLTAGE **4.5VDC**

## ELECTRICAL & MECHANICAL SPECIFICATION

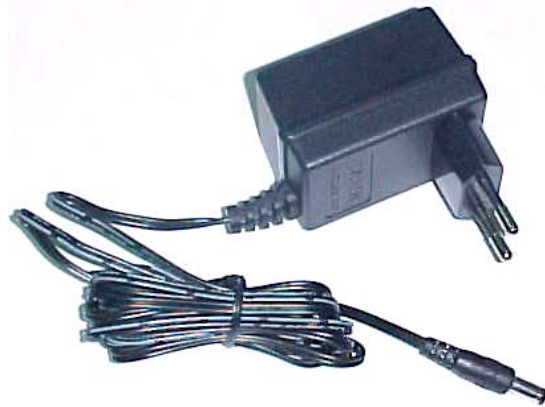

OUTPUT POWER CORD:  
2468 20AWG/2C  
80°C +5.5\*2.1\*12mm (I) PLUG

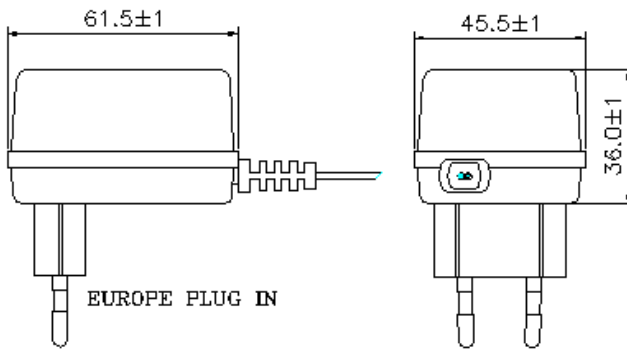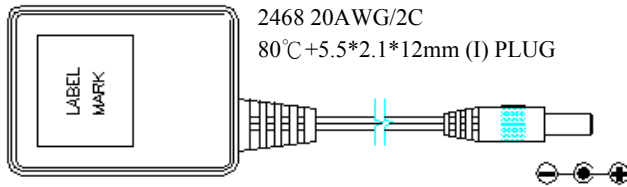

### ELECTRONICAL SPECIFICATION

|                                 |                |          |
|---------------------------------|----------------|----------|
| Input Voltage                   | <b>230~240</b> | Volts    |
| Frequency (Hz)                  | <b>50</b>      | Hz       |
| Power Rated (W)                 | <b>9</b>       | W        |
| Exciting Current With No load   | <b>30</b>      | mA Max   |
| Exciting Current With Full load | <b>40</b>      | mA Max   |
| Output Voltage (DC)             | <b>4.5</b>     | Volts±5% |
| Output Current                  | <b>0.5</b>     | Amp      |
| Output Voltage Without Load     | <b>9.8</b>     | Volts±5% |

### HI-POT :

|                  |                |       |
|------------------|----------------|-------|
| Test Time        | <b>1</b>       | Min   |
| PRI TO SEC       | <b>3750</b>    | Volts |
| PRI TO CORE      | <b>3750</b>    | Volts |
| SEC TO CORE      | <b>1250</b>    | Volts |
| Insulation Class | <b>B (130)</b> | °C    |

### MECHANICAL SPECIFICATION

|                       |                       |    |
|-----------------------|-----------------------|----|
| Dimensions (L*W*H)    | <b>61.5*45.5*36.0</b> | mm |
| Weight                | <b>200</b>            | g  |
| Environment:          |                       |    |
| Operating Temperature | <b>-10 To 40</b>      | °C |
| Storage Temperature   | <b>-20 To 70</b>      | °C |
| Relative Temperature  | <b>40 ±2</b>          | °C |
| RELATIVE HUMIDITY     | <b>90% RH</b>         |    |

Output Cable: **2468 20AWG\*2C 80 °C**  
**1.8M LENGTH+5.5\*2.1\*12mm (I) PLUG**

### ELECTRICAL CIRCUIT

