

TL-U-0.68-4.5D EI28

| | |
|----------------|---------------|
| INPUT VOLTAGE | 120VAC |
| OUTPUT VOLTAGE | 4.5VDC |

ELECTRICAL & MECHANICAL SPECIFICATION




ELECTRONICAL SPECIFICATION

| | | |
|---------------------------------|-------------|------------|
| Input Voltage | 120 | Volts |
| Frequency (Hz) | 60 | Hz |
| Power Rated (W) | 7.0 | W |
| Exciting Current With No load | 40 | mA Max |
| Exciting Current With Full load | 60 | mA Max |
| Output Voltage | 4.5 | VoltsDC±5% |
| Output Current | 0.15 | Amp |
| Output Voltage Without Load | 8.0 | VoltsDC±5% |

HI-POT :

| | | |
|------------------|----------------|-------|
| Test Time | 1 | Min |
| PRI TO SEC | 1250 | Volts |
| PRI TO CORE | 1250 | Volts |
| SEC TO CORE | 1250 | Volts |
| Insulation Class | B (130) | °C |

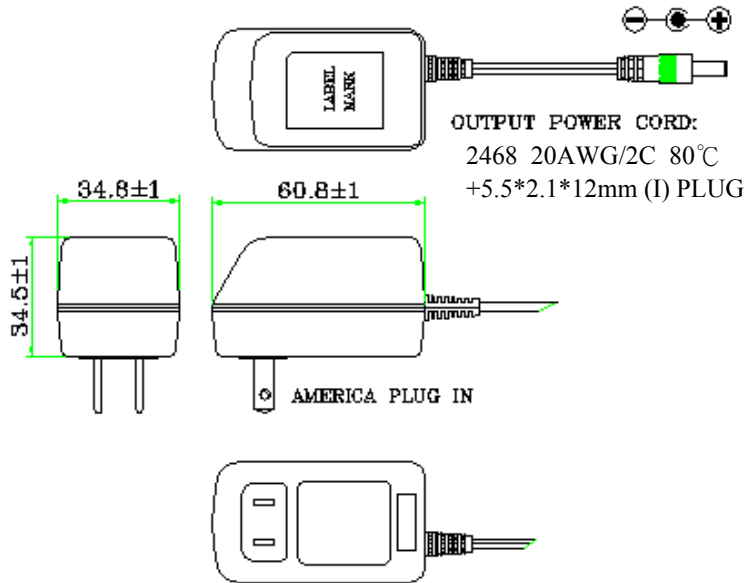

MECHANICAL SPECIFICATION

| | | |
|-----------------------|-----------------------|----|
| Dimensions (L*W*H) | 60.8*34.8*34.5 | mm |
| Weight | 125 | g |
| Environment: | | |
| Operating Temperature | -10 To 40 | °C |
| Storage Temperature | -20 To 70 | °C |
| Relative Temperature | 40°C ±2°C | |

Output Cable: **2468 20AWG/2C 80 °C 1.8M LENGTH + 5.5*2.1*12mm (I)DC PLUG**

RELATIVE HUMIDITY 90% RH

ELECTRICAL CIRCUIT

