

TL-U-0.72-06D EI28

INPUT VOLTAGE	120VAC
OUTPUT VOLTAGE	6.0VDC

ELECTRICAL & MECHANICAL SPECIFICATION




ELECTRONICAL SPECIFICATION

Input Voltage	120	Volts
Frequency (Hz)	60	Hz
Power Rated (W)	7.0	W
Exciting Current With No load	40	mA Max
Exciting Current With Full load	60	mA Max
Output Voltage	6.0	VoltsDC±5%
Output Current	0.12	Amp
Output Voltage Without Load	9.5	VoltsDC±5%

HI-POT :

Test Time	1	Min
PRI TO SEC	1250	Volts
PRI TO CORE	1250	Volts
SEC TO CORE	1250	Volts
Insulation Class	B (130)	°C

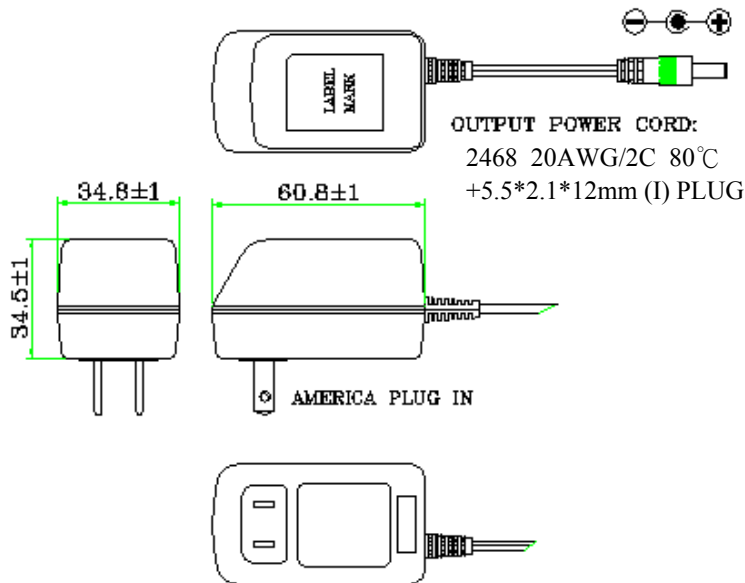

MECHANICAL SPECIFICATION

Dimensions (L*W*H)	60.8*34.8*34.5	mm
Weight	125	g
Environment:		
Operating Temperature	-10 To 40	°C
Storage Temperature	-20 To 70	°C
Relative Temperature	40°C ±2°C	

Output Cable: **2468 20AWG/2C 80 °C 1.8M LENGTH + 5.5*2.1*12mm (I) DC PLUG**

RELATIVE HUMIDITY 90% RH

ELECTRICAL CIRCUIT

