

DC Gear Motor Series



Gearbox with Sleeve Bearings

GMPP30-24

MOTOR INSTALLATION

Rated Volt (V)	24
Rated Torque (g-cm)	130
Rated Speed (rpm)	6160
Rated Current (mA)	≤500
No Load Speed (rpm)	7300
No Load Current (mA)	≤80
Rated Output (W)	8.5


Reduction Ratio	L
1/4~1/5	23.6
1/14~1/35	30.0
1/51~1/139	36.4
1/189~1/939	42.8



GEAR MOTOR TORQUE / SPEED

Reduction Ratio	1/5	1/14	1/19	1/27	1/35	1/51	1/71	1/100	1/139	1/189	1/264	1/516	1/721	1/939						
Rated Torque (kg-cm)	0.54	1.2	1.7	2.4	3.1	4.0	5.5	7.8	8	10	10	10	10	10						
Rated Speed (rpm)	1170	445	320	229	176	121	87	62	46	34.5	26	13.5	9.8	7.3						
Rated Current (mA)	≤500	≤500	≤500	≤500	≤500	≤500	≤500	≤500	≤500	≤500	≤500	≤500	≤500	≤500						
No Load Current (mA)	≤80	≤80	≤80	≤80	≤80	≤80	≤80	≤80	≤80	≤80	≤80	≤80	≤80	≤80						

MOTOR CHARACTERISTICS

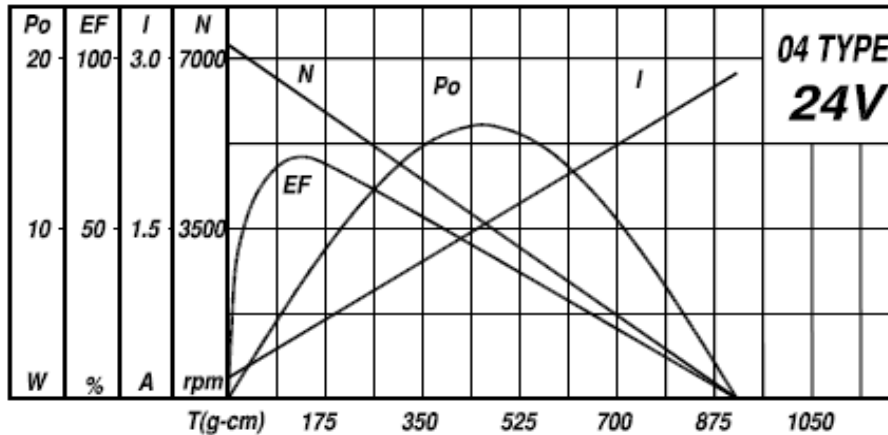

DRAWING

