

DC Gear Motor Series



Gearbox with Sleeve Bearings

GMPP60-1234W

MOTOR INSTALLATION

Rated Volt (V)	12
Rated Torque (g-cm)	700
Rated Speed (rpm)	4760
Rated Current (mA)	≤3300
No Load Speed (rpm)	5100
No Load Current (mA)	≤1500
Rated Output (W)	34.2


Reduction Ratio	L
1/3~1/4	43.3
1/14~1/24	58.8
1/49~1/144	74.3
1/212~1/864	89.8



GEAR MOTOR TORQUE / SPEED

Reduction Ratio	1/3	1/4	1/12	1/15	1/19	1/43	1/53	1/66	1/81	1/100	1/113	1/150	1/230	1/285	1/353	1/488	1/546	1/676
Rated Torque (kg-cm)	1.9	2.4	6	7.4	9	18	22	27	34	42	47	52	80	99	100	100	100	100
Rated Speed (rpm)	1350	1090	385	310	250	110	89	72	58	47	42	31.5	20.5	16.5	13.6	9.8	8.9	7.2

MOTOR CHARACTERISTICS

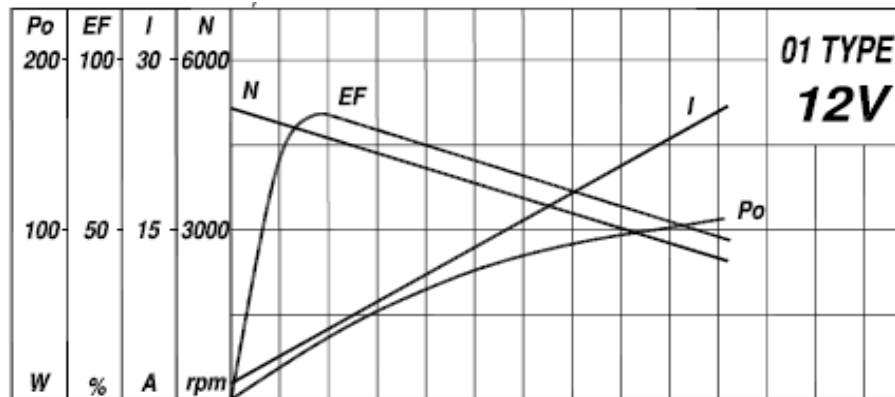

DRAWING

