


TL-U-09-7.5D 48/9

INPUT VOLTAGE **120VAC**
OUTPUT VOLTAGE **7.5VDC**

ELECTRICAL & MECHANICAL SPECIFICATION



OUTPUT POWER CORD:
2468 20AWG/2C 80°C+
5.5*2.1*12mm (I) PLUG

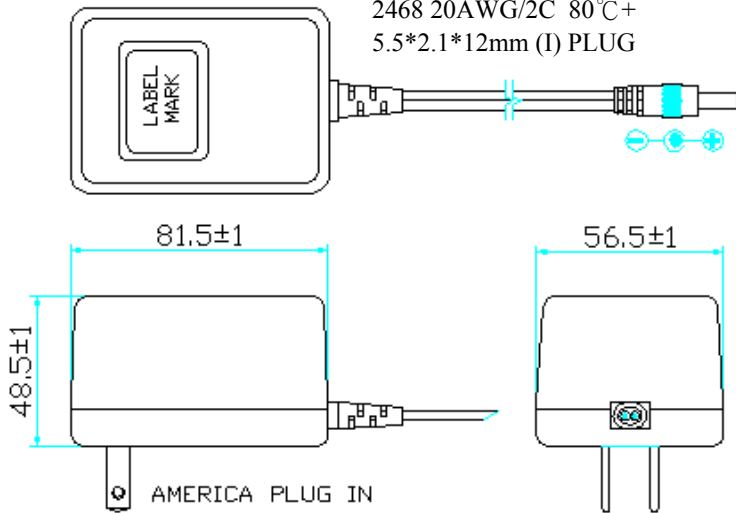

ELECTRONICAL SPECIFICATION

Input Voltage	120	Volts
Frequency (Hz)	60	Hz
Power Rated (W)	21	W
Exciting Current With No load	90	mA Max
Exciting Current With Full load	180	mA Max
Output Voltage (DC)	7.5	Volts±5%
Output Current	1.2	Amp
Output Voltage Without Load	10.5	Volts±5%

HI-POT :

Test Time	1	Min
PRI TO SEC	1250	Volts
PRI TO CORE	1250	Volts
SEC TO CORE	1250	Volts
Insulation Class	B (130)	°C

MECHANICAL SPECIFICATION

Dimensions (L*W*H)	81.5*56.5*48.5	mm
Weight	510	g
Environment:		
Operating Temperature	-10 To 40	°C
Storage Temperature	-20 To 70	°C
Relative Temperature	40 ±2	°C
RELATIVE HUMIDITY	90% RH	

Output Cable: **2468 20AWG/2C 80 °C 1.8M LENGTH + 5.5*2.1*12mm (I) DC PLUG**

ELECTRICAL CIRCUIT

