

TL-U-2.2-18D 35/9

INPUT VOLTAGE **120VAC**
OUTPUT VOLTAGE **18VDC**

ELECTRICAL & MECHANICAL SPECIFICATION





ELECTRONICAL SPECIFICATION

Input Voltage	120	Volts
Frequency (Hz)	60	Hz
Power Rated (W)	9	W
Exciting Current With No load	40	mA Max
Exciting Current With Full load	80	mA Max
Output Voltage (DC)	18.0	Volts±5%
Output Current	0.12	Amp
Output Voltage Without Load	24.0	Volts±5%

HI-POT :

Test Time	1	Min
PRI TO SEC	1250	Volts
PRI TO CORE	1250	Volts
SEC TO CORE	1250	Volts
Insulation Class	B (130)	°C

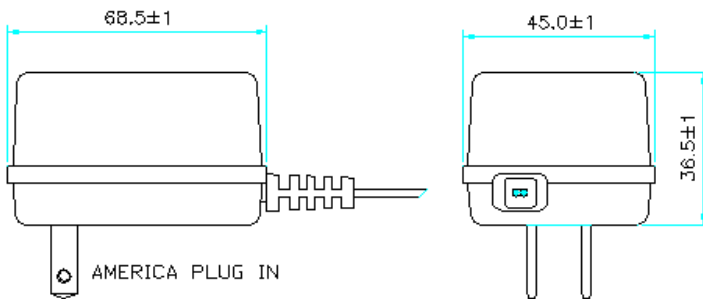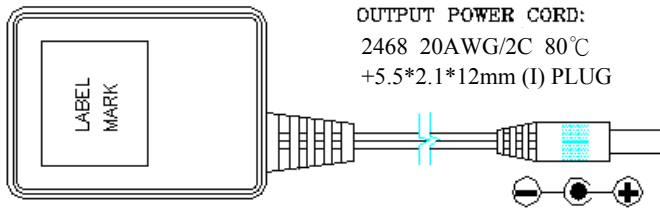

MECHANICAL SPECIFICATION

Dimensions (L*W*H)	68.5*45.0*36.5	mm
Weight	200	g
Environment:		
Operating Temperature	-10 To 40	°C
Storage Temperature	-20 To 70	°C
Relative Temperature	40 ±2	°C
RELATIVE HUMIDITY	90% RH	

Output Cable: **2468 20AWG/2C 80 °C 1.8M LENGTH**
+ 5.5*2.1*12mm (I) DC PLUG

ELECTRICAL CIRCUIT

