

DC Gear Motor Series



Gearbox with Sleeve Bearings

GMPP60-2450W

MOTOR INSTALLATION

Rated Volt (V)	24
Rated Torque (g-cm)	1000
Rated Speed (rpm)	4830
Rated Current (mA)	≤2400
No Load Speed (rpm)	5100
No Load Current (mA)	≤800
Rated Output (W)	49.6


Reduction Ratio	L
1/3~1/4	43.3
1/14~1/24	58.8
1/49~1/144	74.3
1/212~1/864	89.8



GEAR MOTOR TORQUE / SPEED

Reduction Ratio	1/3	1/4	1/12	1/15	1/19	1/43	1/53	1/66	1/81	1/100	1/113	1/150	1/230	1/285	1/353	1/488	1/546	1/676
Rated Torque (kg-cm)	2.7	3.4	8.5	10.5	13	25	31	39	48	60	67	75	100	100	100	100	100	100
Rated Speed (rpm)	1380	1100	390	310	255	110	90	73	59	48	42	32	21	17.1	13.8	10	9	7.3

MOTOR CHARACTERISTICS

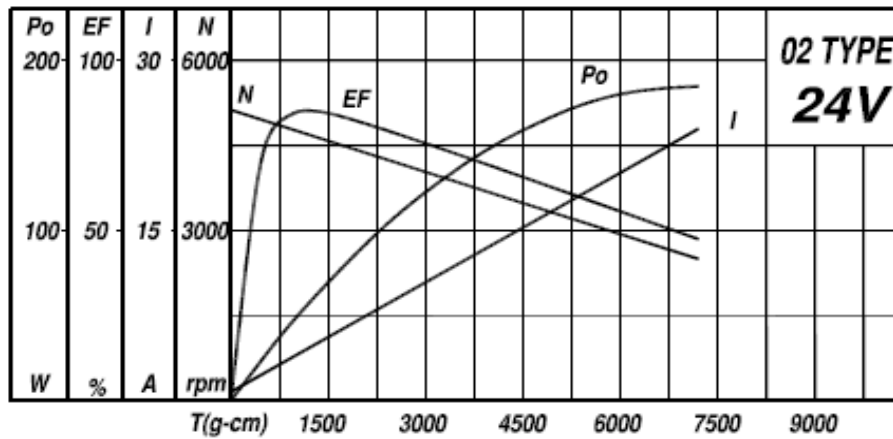

DRAWING

