

DC Gear Motor Series



Gearbox with Sleeve Bearings

GMPP62-12

MOTOR INSTALLATION

Rated Volt (V)	12
Rated Torque (g-cm)	900
Rated Speed (rpm)	1700
Rated Current (mA)	≤1800
No Load Speed (rpm)	2000
No Load Current (mA)	≤450
Rated Output (W)	15.7


Reduction Ratio	L
1/3~1/4	43.6
1/14~1/24	59.1
1/49~1/144	74.6
1/212~1/864	90.1



GEAR MOTOR TORQUE / SPEED

Reduction Ratio	1/3	1/4	1/12	1/15	1/19	1/43	1/53	1/66	1/81	1/100	1/113	1/150	1/230	1/285	1/353	1/488	1/546	1/676
Rated Torque (kg-cm)	2.5	3.2	7.5	9.4	11.8	23	28	35	43	54	61	67	100	100	100	100	100	100
Rated Speed (rpm)	480	390	135	110	90	39.5	32	25.7	21	17	15	11	7.3	6	5	3.7	3.3	2.7

MOTOR CHARACTERISTICS

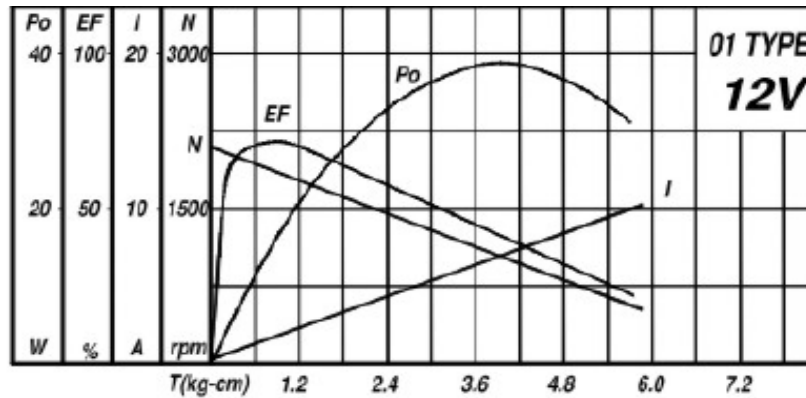

DRAWING

