

# DC Gear Motor Series



Gearbox with Sleeve Bearings

## GMPP62-24

### MOTOR INSTALLATION

Rated Volt (V)	24
Rated Torque (g-cm)	1500
Rated Speed (rpm)	1750
Rated Current (mA)	≤1500
No Load Speed (rpm)	2000
No Load Current (mA)	≤300
Rated Output (W)	26.9


Reduction Ratio	L
1/3~1/4	43.6
1/14~1/24	59.1
1/49~1/144	74.6
1/212~1/864	90.1



### GEAR MOTOR TORQUE / SPEED

Reduction Ratio	1/3	1/4	1/12	1/15	1/19	1/43	1/53	1/66	1/81	1/100	1/113	1/150	1/230	1/285	1/353	1/486	1/546	1/676
Rated Torque (kg-cm)	4.2	5.1	12.5	15.7	19.7	38	47	59	72	90	100	100	100	100	100	100	100	100
Rated Speed (rpm)	500	400	140	115	93	40.5	33	26.5	21.5	17.5	15.4	11.7	7.8	6.3	5.3	3.8	3.4	2.8

### MOTOR CHARACTERISTICS

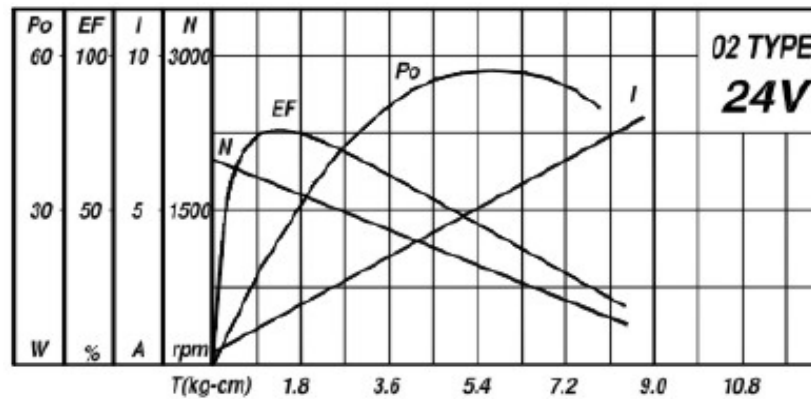

### DRAWING

