



TL-U-5.4-03D 41/9

INPUT VOLTAGE **120VAC**
OUTPUT VOLTAGE **3VDC**

ELECTRICAL & MECHANICAL SPECIFICATION



OUTPUT CORD:
2468 20AWG/2C 80°C
+5.5*2.1*12mm (I) PLUG

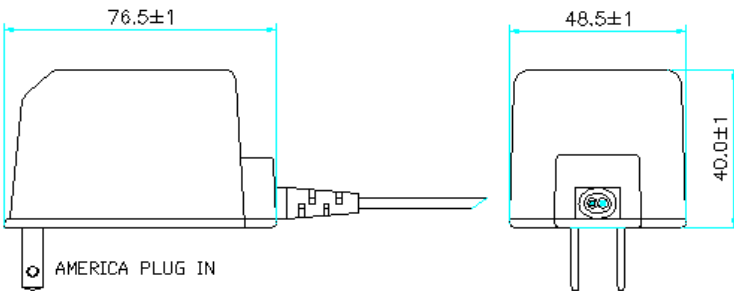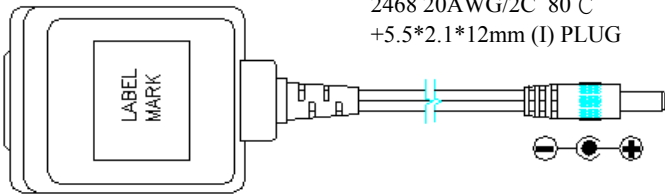

Output Cable: **2468 20AWG/2C 80 °C 1.8M LENGTH**
+ 5.5*2.1*12mm (I) DC PLUG

ELECTRONICAL SPECIFICATION

| | | |
|---------------------------------|------------|----------|
| Input Voltage | 120 | Volts |
| Frequency (Hz) | 60 | Hz |
| Power Rated (W) | 18 | W |
| Exciting Current With No load | 60 | mA Max |
| Exciting Current With Full load | 150 | mA Max |
| Output Voltage (DC) | 3.0 | Volts±5% |
| Output Current | 1.8 | Amp |
| Output Voltage Without Load | 6.5 | Volts±5% |

HI-POT :

| | | |
|------------------|----------------|-------|
| Test Time | 1 | Min |
| PRI TO SEC | 1250 | Volts |
| PRI TO CORE | 1250 | Volts |
| SEC TO CORE | 1250 | Volts |
| Insulation Class | B (130) | °C |

MECHANICAL SPECIFICATION

| | | |
|--------------------------|-----------------------|----|
| Dimensions (L*W*H) | 76.5*48.5*40.0 | mm |
| Weight | 350 | g |
| Environment: | | |
| Operating Temperature | -10 To 40 | °C |
| Storage Temperature | -20 To 70 | °C |
| Relative Temperature | 40 ±2 | °C |
| RELATIVE HUMIDITY | 90% RH | |

ELECTRICAL CIRCUIT

