

DC Gear Motor Series



Gearbox with Sleeve Bearings

GMPP71-24

MOTOR INSTALLATION

Rated Volt (V)	24
Rated Torque (g-cm)	2500
Rated Speed (rpm)	1800
Rated Current (mA)	≤2500
No Load Speed (rpm)	2000
No Load Current (mA)	≤400
Rated Output (W)	46.2


Reduction Ratio	L
1/3~1/4	49.3
1/14~1/24	65.8
1/49~1/144	82.3
1/212~1/864	98.8



GEAR MOTOR TORQUE / SPEED

Reduction Ratio	1/4	1/13	1/16	1/20	1/50	1/60	1/75	1/91	1/102	1/126	1/189	1/242	1/300	1/363	1/414	1/493	1/543	1/611
Rated Torque (kg-cm)	7	23.1	28	34.6	74.9	90.6	112	125	125	125	125	125	125	125	125	125	125	125
Rated Speed (rpm)	510	135	112	90.9	36	29.7	24	19.8	17.7	14.3	9.6	7.6	6.3	5.2	4.5	3.8	3.5	3.1

MOTOR CHARACTERISTICS

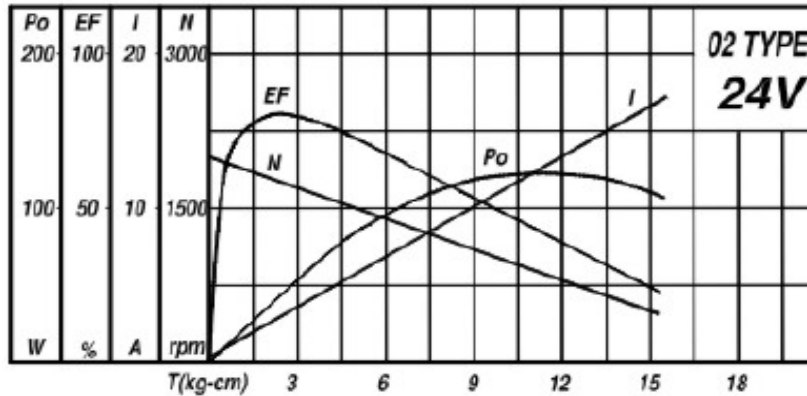

DRAWING

