



**TL-U-9.8-15D 48/9**

INPUT VOLTAGE **120VAC**  
OUTPUT VOLTAGE **15VDC**

## ELECTRICAL & MECHANICAL SPECIFICATION



OUTPUT POWER CORD:  
2468 20AWG/2C 80°C+  
5.5\*2.1\*12mm (I) PLUG

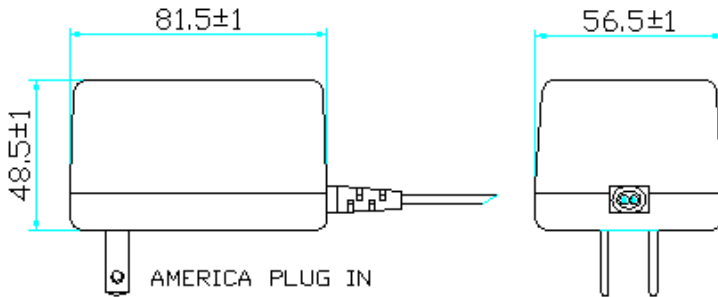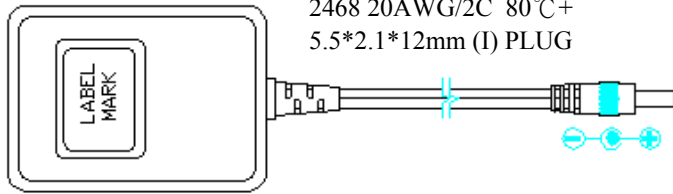

### ELECTRONICAL SPECIFICATION

|                                 |             |          |
|---------------------------------|-------------|----------|
| Input Voltage                   | <b>120</b>  | Volts    |
| Frequency (Hz)                  | <b>60</b>   | Hz       |
| Power Rated (W)                 | <b>21</b>   | W        |
| Exciting Current With No load   | <b>90</b>   | mA Max   |
| Exciting Current With Full load | <b>180</b>  | mA Max   |
| Output Voltage (DC)             | <b>15.0</b> | Volts±5% |
| Output Current                  | <b>0.65</b> | Amp      |
| Output Voltage Without Load     | <b>19.5</b> | Volts±5% |

### HI-POT :

|                  |                |       |
|------------------|----------------|-------|
| Test Time        | <b>1</b>       | Min   |
| PRI TO SEC       | <b>1250</b>    | Volts |
| PRI TO CORE      | <b>1250</b>    | Volts |
| SEC TO CORE      | <b>1250</b>    | Volts |
| Insulation Class | <b>B (130)</b> | °C    |

### MECHANICAL SPECIFICATION

|                          |                       |    |
|--------------------------|-----------------------|----|
| Dimensions (L*W*H)       | <b>81.5*56.5*48.5</b> | mm |
| Weight                   | <b>510</b>            | g  |
| Environment:             |                       |    |
| Operating Temperature    | <b>-10 To 40</b>      | °C |
| Storage Temperature      | <b>-20 To 70</b>      | °C |
| Relative Temperature     | <b>40 ±2</b>          | °C |
| <b>RELATIVE HUMIDITY</b> | <b>90% RH</b>         |    |

Output Cable: **2468 20AWG/2C 80 °C 1.8M LENGTH + 5.5\*2.1\*12mm (I) DC PLUG**

### ELECTRICAL CIRCUIT

