




# CARBONATOR PUMP MOTOR

## Features

### • ACCESSORIES

#### ROTARY VANE PUMP

- Body Material: Brass & Stainless Steel
- Equipped with built-in-by-pass. The balance by-pass is also available upon request.
- Inlet/Outlet NPTF 3/8 in
- Carbonator Clamp Style Mounting
- Flow ranges: 40 ~ 450 liter per hour
- Applications: Beverage vending machine, post-Mix drinking dispenser, Reverse Osmosis, Ultra-filtration

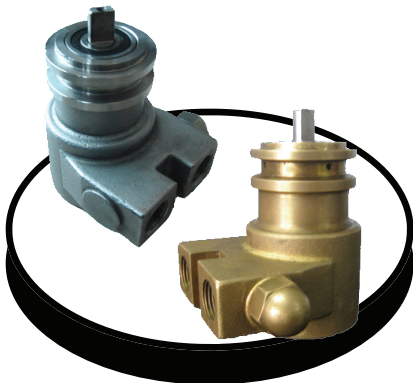

9812 Whithorn Dr.,  
Houston, TX 77095  
Phone: 281.855.2218  
Fax: 281.859.8825  
Email: [motors@telcointercon.com](mailto:motors@telcointercon.com)  
Website: [www.telcointercon.com](http://www.telcointercon.com)

- Split Phase Open Dripproof
- HP: 1/4, 1/3, 1/2, 3/4
- Speed: 1725/1425, 3450 rpm
- Voltage: 100-120/200-240 V; Frequency: 60& 50 Hz
- NEMA Frame 48Y
- Ball Bearings
- Cradle Base Mounting

HP	RPM	Volts	Fr	SF	Bearing	Thermal Protection	FLA
Single speed-Capacitor start, induction run-Dripproof							
1/4	1725	115	48	1.35	BALL	AUTO	5.2
	1725	115	56	1.35	BALL	AUTO	5.2
1/3	3450	115	48	1.35	BALL	AUTO	6.4
	3450	115	56	1.35	BALL	AUTO	6.2
	1725	115	48	1.35	BALL	AUTO	6.2
	1725	115	56	1.35	BALL	AUTO	6.4
1/2	3450	115	56	1.25	BALL	AUTO	8.4
	1725	115	56	1.25	BALL	AUTO	8.6
3/4	3450	115	56	1.25	BALL	AUTO	9.6
	1725	115	56	1.25	BALL	AUTO	11.0
1/4-1/8	1725-1140	115/208-230	56	1	BALL	MANNUAL	5.2/3.6
1/3-1/6	1725-1140	115/208-230	56	1	BALL	MANNUAL	6.2/4.5
1/2-1/4	1725-1140	115/208-230	56	1	BALL	MANNUAL	8.9/5.8
Two-speed, Split phase, Dripproof							
1/4-1/8	1725-1140	115/208-230	56	1	BALL	MANNUAL	5.2/3.6
1/3-1/6	1725-1140	115/208-230	56	1	BALL	MANNUAL	6.2/4.5
1/2-1/4	1725-1140	115/208-230	56	1	BALL	MANNUAL	8.9/5.8