

Fan and Blower

Telco offers a wide range of centrifugal forward curved blowers including the following three types, single inlet, double inlets, and cross flow. The maximum airflow can reach 1200 CFM. TelcoComponents also proudly provides one-stop solution to make your purchase even easier. And plus, with the strong R&D support, we welcome customization on motors as well as accessories.



Fans With Backward-Curved Blades

OD: Ø 133 ~ 400mm
Speed: 1400 ~ 4480 RPM
Airflow: 256 ~ 2200 CFM
Applications: HVAC



Centrifugal Blowers

Speed: 820 ~ 1500 RPM
Airflow: 160 ~ 2750 CFM
Applications: HVAC, Food Equipment



Double Inlet Blowers

Speed: 2800 ~ 3400 RPM
Airflow: 56 ~ 410 CFM
Applications: HVAC




Single Outlet Blowers with Double Inlet

Speed: 600 ~ 1700 RPM
Airflow: 420 ~ 2080 CFM
Applications: HVAC, Food Equipment



Crossflow Blowers

Speed: 1100 ~ 3000 RPM
Airflow: 13.5 ~ 183 CFM
Available with AC motors, BLDC motors, and EC motors
Applications: HVAC, Food Equipment

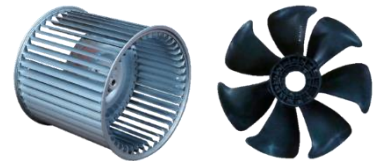

Fan Blades & Blower Wheels

Diameter range from 154 to 300mm
Multiple pitch angle options
Strip, tablock, plastic types available

Telco Intercontinental Corp.

9812 Whithorn Drive
Houston, TX 77095
www.telcointercon.com

sales@telcointercon.com
(281) 855-2218



A division of **TELCO**