




Specifications

Item	Unit	VA604030SC
Rated Output	W	400.0
Amplifier Type		TSTA20C
Rated terminal voltage	V	77.53
Rated Torque	N m	1
Rated Current	A	3.5
Rated Speed	rpm	3000
Peak Torque	N m	3.82
Peak Current	A	11
Torque Constant	N m/A	0.39
Voltage Constant	V/K rpm	40
Inertia (GD2 /4)	Kg cm	0
Resistance	Ω	2.94
Inductance	mH	6
Mechanical Time Constant	ms	1.970
Electrical Time Constant	ms	2
Weight (standard)	Kg	1.44
Speed Detector	Optics Encoder(INC: 2000P/R, ABS: 2048P/R)	
Time	Continuous	
Insulation class	F Class (155°C)	
Insulation Voltage	AC 1500V at 1 minute	
Insulation resistance	DC 500V Above 10 M Ω	
Structure	Fully closed	
Shockproofness	Below 2.5G	
Altitude	Under 1000m	
Temperature Humidity	Temperature: 0~40, Humidity: Below 90%RH (No Frosting)	
Temp. Humidity for storage	Temperature: -20 ~60, Humidity: Below 90%RH (No Frosting)	
Color	N 1.5	
Fixing Mode	Flange	

Outline Drawing

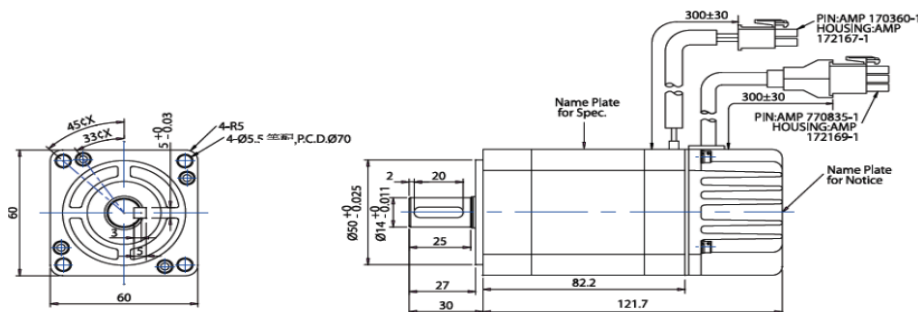

Performance Curve

