

DC Gear Motor Series



Gearbox with Sleeve Bearings

GMPP32-2413P

MOTOR INSTALLATION

Rated Volt (V)	24
Rated Torque (g-cm)	240
Rated Speed (rpm)	5150
Rated Current (mA)	≤750
No Load Speed (rpm)	6000
No Load Current (mA)	≤130
Rated Output (W)	12.7


Reduction Ratio	L
1/4~1/5	22.1
1/14~1/27	28.5
1/51~1/139	34.9
1/189~1/4721	41.3



GEAR MOTOR TORQUE / SPEED

Reduction Ratio	1/5	1/14	1/19	1/27	1/51	1/71	1/100	1/139	1/189	1/264	1/516	1/721								
Rated Torque (kg-cm)	1	2.3	3.2	4.5	7.3	8	10	10	12	12	12	12								
Rated Speed (rpm)	990	375	268	192	101	74.5	54	40	29.5	22	11.5	8								
Rated Current (mA)	≤750	≤750	≤750	≤750	≤750	≤750	≤750	≤750	≤750	≤750	≤750	≤750								
No Load Current (mA)	≤130	≤130	≤130	≤130	≤130	≤130	≤130	≤130	≤130	≤130	≤130	≤130								

MOTOR CHARACTERISTICS

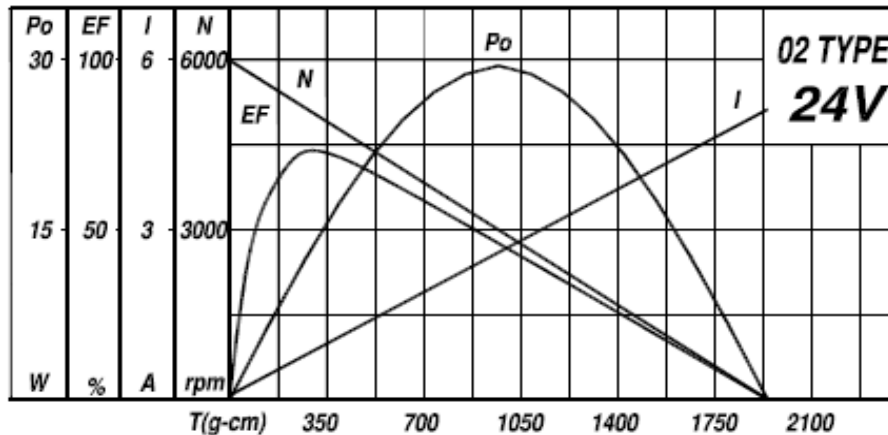

DRAWING

