

# DC Gear Motor Series



Gearbox with Sleeve Bearings

## GMPP43-24

### MOTOR INSTALLATION

Rated Volt (V)	24
Rated Torque (g-cm)	280
Rated Speed (rpm)	5250
Rated Current (mA)	≤900
No Load Speed (rpm)	6000
No Load Current (mA)	≤170
Rated Output (W)	15.56


Reduction Ratio	L
1/4	26.15
1/14~1/24	32.95
1/49~1/144	39.75
1/212~1/864	46.45



### GEAR MOTOR TORQUE / SPEED

Reduction Ratio	1/4	1/14	1/17	1/24	1/49	1/61	1/84	1/104	1/144	1/212	1/294	1/504	1/624	1/720	1/864
Rated Torque (kg-cm)	0.9	2.6	3.1	4.5	8	10	14	17	20	25	30	30	30	30	30
Rated Speed (rpm)	1290	375	302	218	107	86.5	62.5	50.5	39	26.2	18.8	11.2	8.8	8	6.5

### MOTOR CHARACTERISTICS

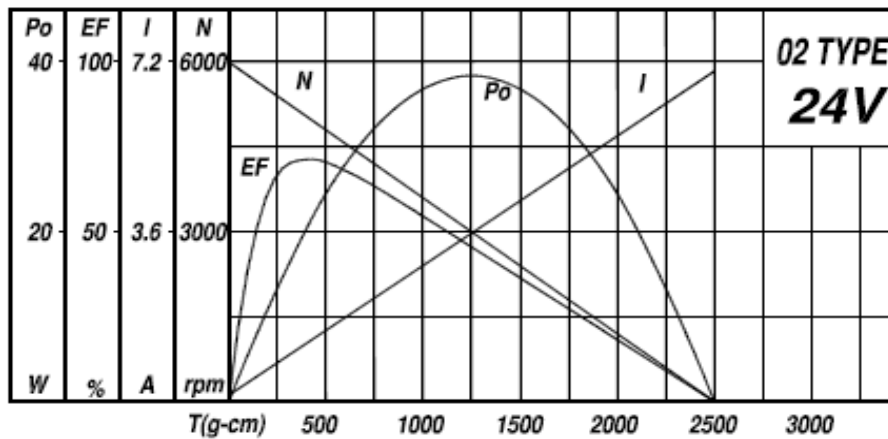

### DRAWING

