

DC Gear Motor Series



Gearbox with Sleeve Bearings

GMPP52-1234

MOTOR INSTALLATION

Rated Volt (V)	12
Rated Torque (g-cm)	900
Rated Speed (rpm)	3620
Rated Current (mA)	≤4100
No Load Speed (rpm)	4000
No Load Current (mA)	≤1200
Rated Output (W)	33.5


Reduction Ratio	L
1/4	53.0
1/14~1/24	68.5
1/49~1/144	84.0
1/212~1/864	99.5



GEAR MOTOR TORQUE / SPEED

Reduction Ratio	1/3	1/4	1/12	1/15	1/19	1/43	1/53	1/66	1/81	1/100	1/113	1/150	1/230	1/285	1/353	1/488	1/546	1/676
Rated Torque (kg-cm)	1.3	1.65	4.1	5	6.3	12	15	19	23	28	32	36	55	68	84	100	100	100
Rated Speed (rpm)	1524	1230	444	359	290	127	102	83	66.5	54	48	36	23.5	19	15.5	11.6	10.5	8.4

MOTOR CHARACTERISTICS

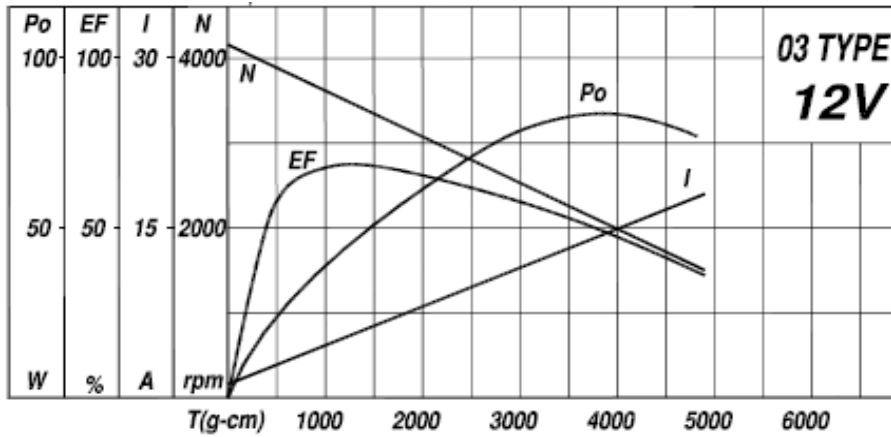

DRAWING

