

# DC Gear Motor Series



Gearbox with Sleeve Bearings

## GMPP52-2448

### MOTOR INSTALLATION

Rated Volt (V)	24
Rated Torque (g-cm)	650
Rated Speed (rpm)	5450
Rated Current (mA)	≤2750
No Load Speed (rpm)	6000
No Load Current (mA)	≤750
Rated Output (W)	48.3


Reduction Ratio	L
1/4	53.0
1/14~1/24	68.5
1/49~1/144	84.0
1/212~1/864	99.5



### GEAR MOTOR TORQUE / SPEED

Reduction Ratio	1/3	1/4	1/12	1/15	1/19	1/43	1/53	1/66	1/81	1/100	1/113	1/150	1/230	1/285	1/353	1/488	1/546	1/676
Rated Torque (kg-cm)	1.8	2.2	5.5	6.8	8.5	16	20	25	31	39	44	48	74	92	100	100	100	100
Rated Speed (rpm)	1524	1230	444	359	290	127	102	83	66.5	54	48	36	23.5	19	15.5	11.6	10.5	8.4

### MOTOR CHARACTERISTICS

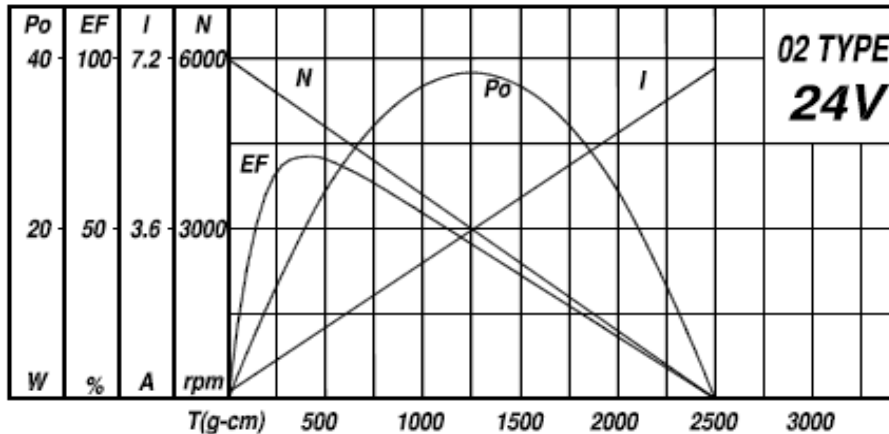

### DRAWING

