

DC Gear Motor Series



Gearbox with Sleeve Bearings

GMPP80-24

MOTOR INSTALLATION

Rated Volt (V)	24
Rated Torque (g-cm)	3200
Rated Speed (rpm)	1800
Rated Current (mA)	≤3400
No Load Speed (rpm)	2000
No Load Current (mA)	≤600
Rated Output (W)	59


Reduction Ratio	L
1/3~1/4	52.3
1/14~1/24	68.8
1/49~1/144	85.3
1/212~1/864	101.8



GEAR MOTOR TORQUE / SPEED

Reduction Ratio	1/4	1/13	1/15	1/19	1/21	1/49	1/55	1/71	1/80	1/103	1/117	1/186	1/210	1/306	1/393	1/445	1/571	1/647
Rated Torque (kg-cm)	9.7	28.6	32	41	47	93	99	125	125	125	125	125	125	125	125	125	125	125
Rated Speed (rpm)	470	140	124	95	85	36	32	25.5	23	17.8	15.6	9.9	8.8	6	4.7	4.2	3.3	2.9

MOTOR CHARACTERISTICS

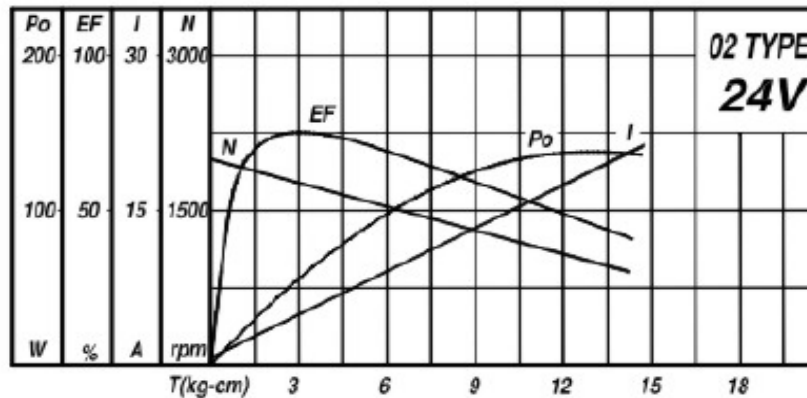

DRAWING

